外壳 / Hood & Housing

Harking

外壳部分 / Hoods & Housings Contents

规格Size	页码Page
3A外壳Hoods/Housings	122–128
10A外壳Hoods/Housings	129–130
16A外壳Hoods/Housings	131–132
32A外壳Hoods/Housings	133–134
6B外壳Hoods/Housings	135–144
10B外壳Hoods/Housings	145–163
16B外壳Hoods/Housings	164–184
24B外壳Hoods/Housings	185–206
32B外壳Hoods/Housings	207–212
48B外壳Hoods/Housings	213–214
HC外壳Hoods/Housings	215–222

Harking

外壳部分 / Hoods & Housings Contents

3A 塑料外壳 IP65 / Size 3A Plastic Hoods & Housings IP65

材料	Material	聚碳酸酯 Polycarbonate
颜色	Colour	灰白 Light grey(RAL 7032)
联锁元件	Locking element	
–联锁方式	–Lever type	塑料弹性压合 Lever,plastic
–材料	–Material	聚酰胺 Polyamide
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

塑料外壳 IP65 / Plastic Hoods & Housings IP65

材料	Material	PA+20GF
颜色	Colour	深蓝色 Prussian blue
联锁元件	Locking element	
–联锁方式	–Lever type	塑料弹性压合 Lever,plastic
–材料	–Material	PA+20GF
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

3A 金属外壳 IP65 / Size 3A Metal Hoods & Housings IP65

材料	Material	铸锌 zinc die–cast
颜色	Colour	灰色 Grey
联锁元件	Locking element	
–联锁方式	–Lever type	金属弹性压合 Lever
–材料	–Material	金属(铁)镀锌 metal galvanized/nickel plating
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

金属外壳 IP65 / Metal Hoods & Housings IP65

材料	Material	铸铝合金 Aluminium die–cast,corrosion resistant
颜色	Colour	灰色 Grey
联锁元件	Locking element	
–联锁方式	–Lever type	金属弹性压合 Lever
–材料	–Material	金属(铁)镀锌 metal galvanized/nickel plating
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

3A 高防护外壳 IP68 / Size 3A Pressure tight Hoods & Housings IP68

表面处理	Surface	喷涂/镀铬 Epoxy power paint/Chromated
材料	Material	铸锌 zinc die–cast
颜色	Colour	黑色/灰色 Black or grey
联锁元件	Locking element	
–联锁方式	–Lever type	螺栓连接 Screw locking
–材料	–Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP68

Harking

外壳部分 / Hoods & Housings Contents

耐腐蚀(高环境)外壳 IP65 /

表面处理	Surface	环氧粉末涂料 Epoxy powder
材料	Material	铸铝合金 Aluminium die-cast,corrosion resistant
颜色	Colour	RAL 9005(黑色Black)
联锁元件	Locking element	
-联锁方式	-Lever type	金属弹性压合 Lever
-材料	-Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

EMC电磁兼容外壳 / EMC Electromagnetic Compatibility Hoods & Housings IP65

材料	Material	铸锌 zinc die-cast
颜色	Colour	
联锁元件	Locking element	
-联锁方式	-Lever type	金属(铁)弹性压合/螺栓连接 Lever/screw locking
-材料	-Material	金属(铁)镀锌 metal galvanized/nickel plating
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

高防护外壳 IP68 / Pressure tight Hoods & Housings IP68

材料	Material	铸铝合金 Aluminium die-cast,corrosion resistant
颜色	Colour	黑色或灰色 Black or grey
联锁元件	Locking element	
-联锁方式	-Lever type	螺栓连接 Screw locking
-材料	-Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP68

HC 金属外壳 IP65 / HC Metal Hoods & Housings IP65

表面处理	Surface	喷涂/镀铬/镀镍 Epoxy power paint/Chromated/nickeling
材料	Material	铸锌 zinc die-cast
颜色	Colour	黑色/黑色/亚光镍 Black/brushed nickel
联锁元件	Locking element	
-联锁方式	-Lever type	金属弹性压合 Lever
-材料	-Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

HC 塑料外壳 IP65 / HCPlastic Hoods & Housings IP65

材料	Material	聚碳酸酯 Polycarbonate
颜色	Colour	灰白 Light grey(RAL 7032)
联锁元件	Locking element	
-联锁方式	-Lever type	塑料弹性压合 Lever,plastic
-材料	-Material	聚酰胺 Polyamide
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125℃
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

3A 塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection： IP65

上壳 侧出线 Hoods, side entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-SE-2B-M20	19200030620
PG11	H3A.P-SE-2B-PG11	09200030620



上壳 顶出线 Hoods, top entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-TE-2B-M20	19200030420
PG11	H3A.P-TE-2B-PG11	09200030420



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	H3A.P-BK-1L	09200030320



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	H3A.P-BK-1L-SE	09200030820



封底下壳 Housings, surface mounting

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-SF-1L-M20	19200030220
PG11	H3A.P-SF-1L-PG11	09200030220



飞线下壳 Housings, cable to cable

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-CCT-1L-M20	19200030720
PG11	H3A.P-CCT-1L-PG11	09200030720



Harking

3A 塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection： IP65

防护盖 Protection covers

接线方式 Connect way	型号 Type	订货号 Part Number
	H3A-CV-1L/1M (配公芯 for male insert)	09200035442
	H3A-CV-1L/1F (配母芯 for female insert)	09200035441



防护盖 Protection covers

接线方式 Connect way	型号 Type	订货号 Part Number
	H3A-CV-2B/1M (配公芯 for male insert)	09200035448
	H3A-CV-2B/2M (配公芯 for male insert)	09200035446
	H3A-CV-2B/1F (配母芯 for female insert)	09200035447
	H3A-CV-2B/2F (配母芯 for female insert)	09200035445



Harking

3A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection： IP65

上壳 侧出线 Hoods, side entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-SE-2B-M20	19200031640
PG11	H3A-SE-2B-PG11	09200031640



上壳 顶出线 Hoods, top entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-TE-2B-M20	19200031440
PG11	H3A-TE-2B-PG11	09200031440
PG13.5	H3A-TE-2B-PG13.5	09200031441



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	H3A-BK-1L	09200030301



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	H3A-BK-1L-MCV/M (配公芯for male insert)	09200030305
---	H3A-BK-1L-MCV/F (配母芯for female insert)	09200030306



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	H3A-BK-1L-SE	09200030801



封底下壳 Housings, surface mounting

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-SF-1L-M20	19200031250
PG11	H3A-SF-1L-PG11	09200031250
PG13.5	H3A-SF-1L-PG13.5	09200031251



飞线下壳 Housings, cable to cable

螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-CCT-1L-M20	19200031750
PG11	H3A-CCT-1L-PG11	09200031750



Harking

3A 金属外壳(EMC) Metal Hoods & Housings

防护等级 Degree of protection： IP65

上壳 侧出线 Hoods, side entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-SE-2B-M20	19620031640
PG11	EMC.H3A-SE-2B-PG11	09620031640



上壳 顶出线 Hoods, top entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-TE-2B-M20	19620031440
PG11	EMC.H3A-TE-2B-PG11	09620031440



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	EMC.H3A-BK-1L	09620030301



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	EMC.H3A-BK-1L-MCV/M (配公芯for male insert)	09620030305
---	EMC.H3A-BK-1L-MCV/F (配母芯for female insert)	09620030306



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
---	EMC.H3A-BK-1L-SE	09620030801



封底下壳 Housings, surface mounting

螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-SF-1L-M20	19620031250
PG11	EMC.H3A-SF-1L-PG11	09620031250



飞线下壳 Housings, cable to cable

螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-CCT-1L-M20	19620031750
PG11	EMC.H3A-CCT-1L-PG11	09620031750



Harking

3A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection： IP65

防护盖 Protection covers

接线方式 Connect way	型号 Type	订货号 Part Number
	H3A–MCV–1L/1M (配公芯 for male insert)	09200035422
	H3A–MCV–1L/1F (配母芯 for female insert)	09200035421



防护盖 Protection covers

接线方式 Connect way	型号 Type	订货号 Part Number
	H3A–MCV–2B/1M (配公芯 for male insert)	09200035426
	H3A–MCV–2B/2M (配公芯 for male insert)	09200035425
	H3A–MCV–2B/1F (配母芯 for female insert)	09200035428
	H3A–MCV–2B/2F (配母芯 for female insert)	09200035427



Harking

3A 高防护外壳 Pressure tight Hoods & Housings

喷涂/镀铬 Epoxy power paint/Chromated　防护等级 Degree of protection: IP68　H version

上壳 顶出线 Hoods, top entry

螺纹 Thread	型号 Type	订货号 Part Number
	喷涂・螺栓联锁 Epoxy power paint・Screw locking	
M20	HP3A/H-TE-2S-M20	19407030410
PG13.5	HP3A/H-TE-2S-PG13.5	09407030302
	喷涂・轴销联锁 Epoxy power paint・Toggle locking	
M20	HP3A/H-TE-2T-M20	19407030400
PG13.5	HP3A/H-TE-2T-PG13.5	09407030402
	镀铬・螺栓联锁 Chromated・Screw locking	
M20	C.HP3A/H-TE-2S-M20	19400030410
PG13.5	C.HP3A/H-TE-2S-PG13.5	09400030302
	镀铬・轴销联锁 Chromated・Toggle locking	
M20	C.HP3A/H-TE-2T-M20	19400030400
PG13.5	C.HP3A/H-TE-2T-PG13.5	09400030402



不封底下壳 Housings, bulkhead mounting*

螺纹 Thread	型号 Type	订货号 Part Number
	喷涂・螺栓联锁 Epoxy power paint・Screw locking	
---	HP3A/H-BK-2H	09407030311
	喷涂・轴销联锁 Epoxy power paint・Toggle locking	
---	HP3A/H-BK-2T	09407030301
	镀铬・螺栓联锁 Chromated・Screw locking	
---	C.HP3A/H-BK-2H	09400030311
	镀铬・轴销联锁 Chromated・Toggle locking	
---	C.HP3A/H-BK-2T	09400030301



适配器 适用不封底下壳 Adaptor for Housings*

螺纹 Thread	型号 Type	订货号 Part Number
	喷涂 Epoxy power paint	
---	HP3A/H-BK-SE	09407030902
	镀铬 Chromated	
---	C.HP3A/H-BK-SE	09400030902



封底下壳 Housings, surface mounting

螺纹 Thread	型号 Type	订货号 Part Number
	喷涂・螺栓联锁 Epoxy power paint・Screw locking	
M20	HP3A/H-SF-2H-M20	19407030950
PG13.5	HP3A/H-SF-2H-PG13.5	09407030502
	镀铬・螺栓联锁 Chromated・Screw locking	
M20	C.HP3A/H-SF-2H-M20	19400030950
PG13.5	C.HP3A/H-SF-2H-PG13.5	09407030602



不封底下壳 Housings, bulkhead mounting

螺纹 Thread	型号 Type	订货号 Part Number
	喷涂・螺栓联锁 Epoxy power paint・Screw locking	
---	HP3A/H-SF-2H	09407030950
	镀铬・螺栓联锁 Chromated・Screw locking	
---	C.HP3A/H-SF-2H	09400030950



Harking

3A 高防护外壳 Pressure tight Hoods & Housings

喷涂/镀铬 Epoxy power paint/Chromated　防护等级 Degree of protection: IP68　H version

上壳 顶出线 高结构 Hoods, top entry, high construction

螺纹 Thread	型号 Type	订货号 Part Number
	喷涂・螺栓联锁 Epoxy power paint・Screw locking	
M25	HP3A/H-TEH-2S-M25	19407030411
	喷涂・轴销联锁 Epoxy power paint・Toggle locking	
M25	HP3A/H-TEH-2T-M25	19407030500
	镀铬・螺栓联锁 Chromated・Screw locking	
M25	C.HP3A/H-TEH-2S-M25	19400030411
	镀铬・轴销联锁 Chromated・Toggle locking	
M25	C.HP3A/H-TEH-2T-M25	19400030500



防护盖 Protection covers

接线方式Connect way	型号 Type	订货号 Part Number
---	喷涂・螺栓联锁 Epoxy power paint・Screw locking	
	HP3A/H-MCV-2S	09407030501
	HP3A/H-MCV-2S/2S	09407030601
—	喷涂・轴销联锁 Epoxy power paint・Toggle locking	
	HP3A/H-MCV-2T	09407030301
	HP3A/H-MCV-2T/2S	09407030701
---	镀铬・螺栓联锁 Chromated・Screw locking	
	C.HP3A/H-MCV-2S	09400030501
	C.HP3A/H-MCV-2S/2S	09400030601
---	镀铬・轴销联锁 Chromated・Toggle locking	
	C.HP3A/H-MCV-2T	09400030301
	C.HP3A/H-MCV-2T/2S	09400030701



防护等级 Degree of protection: IP68　W version

上壳 顶出线 Hoods, top entry

螺纹 Thread	型号 Type	订货号 Part Number
M20	HP3A-TE-2S-M20	19407031440
PG11	HP3A-TE-2S-PG11	09407031440



不封底下壳 Housings, bulkhead mounting
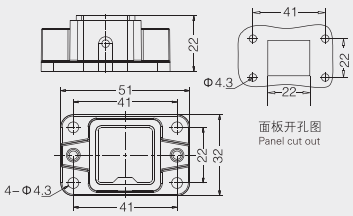
螺纹 Thread	型号 Type	订货号 Part Number
---	HP3A-BK-2H	09407030308